

Clean  
Energy

venair

Flexible silicone hoses for renewable energies



Fluid solutions. Solid performance.

● ABOUT US

At **Venair**, we design and create fluid transfer solutions that help top leading companies run all their operations with precision and reliability.

Today, we present more than 35 years of experience manufacturing custom high-quality product and delivering direct assistance to the most demanding industries across the world.


Together, we will achieve the maximum operability for your critical applications.



HEADQUARTERS (SPAIN)


# +35 years of meaningful innovation

We're involved in each part of the creation, design and engineering of the solution.




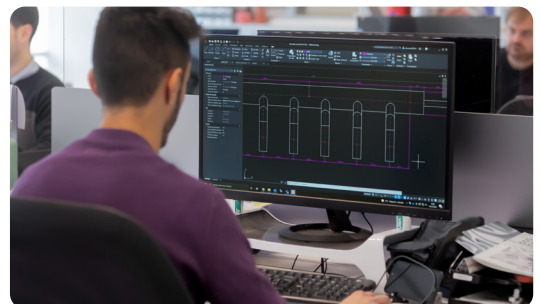
## Material research and product development

Research of new materials  
Development of new products or improvement of existing ones

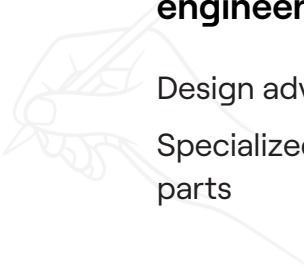

## Design and engineering support

Design advice  
Specialized in the design of customized parts



## Quality assurance

Tailor-made testing for each application  
Product certifications required for each market or customer



## Custom manufacturing

Custom pieces  
Process automation for series production



# Clean Energy

Venair develops custom solutions for Clean Energy. We provide flexible hoses that adapt to the different requirements of the industry.

Our main subsectors are PEM Fuel Cells and electrolyzers, Green mobility, and renewable energy.



## • Content

---

01	Products .....	05
02	Specification Charts .....	14
03	Venair in the world .....	19

# 1. Products

## • ANODE PEM FUEL CELLS

VENA® PEM FUEL	06
----------------	----

---

VENA® PEM CELL	07
----------------	----

---

## • CATHODE PEM FUEL CELLS

VENA® PEM FUEL	06
----------------	----

---

VENA® PEM CELL	07
----------------	----

---

VENA® PEM PURE	08
----------------	----

---

## • DI WATER AND COOLING SYSTEMS

VENA® PEM CELL	07
----------------	----

---

VENA® PEM PURE	08
----------------	----

---

VENA® PEM COOL	09
----------------	----

---

VENA® SIL 200	10
---------------	----

---

VENA® SIL 700V	11
----------------	----

---

VENA® SIL FR-V0	12
-----------------	----

---


VENA® SIL FR-HL	13
-----------------	----


---

● VENAIR CLEAN ENERGY

ANODE  
CATHODE



 **Material**  
FKM fluorocarbon +  
Silicone VMQ  
(Vinyl Methyl Quality)  
+ Polyester fabric

 **Temperature**  
-40°C / +180°C-200°C  
(-122°F / +356°F)

Highly flexible fluorocarbon hose

## VENA® PEM FUEL

### CONSTRUCTION

FKM (fluorocarbon-based polymer) inner layer  
+ Silicone VMQ (Vinyl Methyl Quality)  
+ Polyester fabric embedded in the wall.

### APPLICATIONS

Mostly used when there are strict minimum permeability requirements. Also recommended for the low level of critical pollutants it releases. So it is mostly always required for the anode subsystem, very often also required on the cathode and to a lesser extent in the coolant and DI Water subsystems due to the low conductivity it imparts to the medium.

### CERTIFICATIONS

Railway standards, flammability.  
UL-94 (V0-V1)  
EN-45545-2

### CONFIGURATIONS

- Highly resistant to hardening with very good compression characteristics.
- Aramid 200°C
- FKM-X Conductive FKM inner layer

Can be customized according to customer requirements. It can be modified to withstand high pressure, high temperature, change colour, vacuum resistance.

### APPEARANCE

Smooth inner and outer appearance, red colour (normally used for Hydrogen conduction) and external green colour used for Cathode. But other colours available.

### FEATURES

Low permeability, low electrical conductivity rate imparted to the medium, low level of leachables and high flexibility. We apply our maximum cleanliness protocol for all PEMFC products.




Technical Table  
See on page: 15

● VENAIR CLEAN ENERGY

ANODE  
CATHODE  
DI WATER  
COOLING



**Material**  
 EPDM based composite + Polyester fabric

**Temperature**  
 -50°C / +130-150°C  
(-4°F / +266-302°F)

Highly Flexible EPDM hybrid hose

# VENA® PEM CELL

## CONSTRUCTION

This reference is manufactured with three polyester fabric reinforcements.

Different shapes can be manufactured to adapt the construction to any installation and geometry requirement.

## APPLICATIONS

It has been specifically designed for PEMFC. Very interesting according to its very low permeability rate. Also recommended for the low level of critical pollutants it releases. So it is mostly always required for the anode and cathode subsystems, very often also required on the coolant and DI water systems due to very low conductivity it imparts to the medium.

## CERTIFICATIONS

RoHS Directive 2002/95/EC and its subsequent amendments including the RoHS2 Directive 2011/65/EU and RoHS3 Directive 2015/863.

## CONFIGURATIONS

Can be customized according to customer requirements. It can be modified to withstand high pressure, high temperature, change colour...

## APPEARANCE

Usually external green colour used for Cathode, external blue color for DI water and Coolant applications and red colour for Hydrogen conduction. However it can be customized under request.

## FEATURES

Low permeability, low electrical conductivity rate imparted to the medium, low level of leachables and high flexibility. We apply our maximum cleanliness protocol for all PEMFC products.



Technical Table  
See on page: 15



Highly flexible platinum cured silicone hose

## VENA® PEM PURE



### Material

Platinum cured silicone +  
Silicone VMQ  
(Vinyl Methyl Quality)  
+ Polyester fabric



### Temperature

-60°C / +180-200°C  
(-75°F / +356-392°F)



### CONSTRUCTION

Transparent platinum cured silicone (inner layer)  
+ Silicone VMQ (Vinyl Methyl Quality)  
+ Polyester fabric embedded in the wall.



### CONFIGURATIONS

Can be customized according to customer requirements. It can be modified to withstand high pressure, high temperature, change colour, vacuum resistance...



### APPLICATIONS

Mostly recommended for the low level of critical pollutants it releases. So it is mostly always required for the coolant and DI water subsystems, very often also required on the cathode.



### APPEARANCE

Usually external green color used for Cathode and external blue colour for DI water and Coolant applications, but colour can be customized under request.



### CERTIFICATIONS

Railway standards, flammability.  
UL-94 (V0-V1)  
EN-45545-2




### FEATURES

Low level of leachables, low electrical conductivity rate imparted to the medium and high flexibility. We apply our maximum cleanliness protocol for all PEMFC products.



Technical Table  
See on page: 16



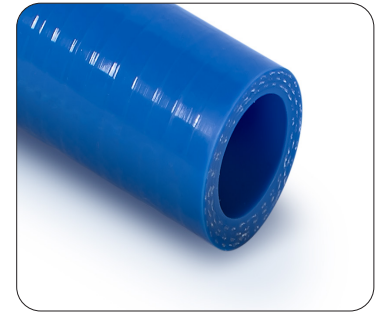

**Material**

Blue Silicone VMQ  
(Vinyl Methyl Quality)  
+ Polyester fabric



**Temperature**

-60°C / +180-200°C  
(-75°F / +356-392°F)

Highly flexible smooth silicone hose

# VENA® PEM COOL

 **CONSTRUCTION**

Blue Silicone VMQ (Vinyl Methyl Quality)  
+ Polyester fabric embedded in the wall.

• **APPLICATIONS**

Mostly recommended for coolant systems. It is the standard peroxide cured silicone used in a wide range of vehicles and industrial purposed but applying some precedures in the manufacturing process to reduce the level of leachables and increase the purity of the system.

 **CERTIFICATIONS**

- SAE J20 R1 Class A.
- Material used in accordance with EU Directive 2015/863 for Restriction of the use of hazardous substances (RoHS 3).



**CONFIGURATIONS**

Can be customized according to customer requirements. It can be modified to withstand high pressure, high temperature, change colour, vacuum resistance...

We can manufacture specific shapes including lateral outs, reducers, elbows...




**APPEARANCE**

Usually external blue colour is used for DI water and coolant applications, but colour could be customized under request.



**FEATURES**

Low electrical conductivity rate and high flexibility. We apply our maximum cleanliness protocol for all PEMFC products.



Technical Table  
See on page: 16

● VENAIR CLEAN ENERGY



Silicone hoses for cooling and heating systems

# VENA® SIL 200



**Material**

Blue Silicone VMQ  
(Vinyl Methyl Quality)  
+ Polyester fabric



**Temperature**

-55°C / +180°C-200°C  
(-67°F / +356°F)



**CONSTRUCTION**

- SIL 200: 3 plies of polyester fabric
- It can also be supplied with another type of textile reinforcement (Aramid, fiberglass).



**CONFIGURATIONS**

- SIL MRLN: Special construction for high pressure resistance.
- SIL 200/240-X: Conductive silicone material.



**APPLICATIONS**

For use in water cooling and heating systems in buses, coaches, trucks, industrial vehicles, railway, marine, aerospace, cogeneration units, and transport of high temperature fluids in general industry.



**STANDARD WALL THICKNESS**

- SIL 200: 4,3mm (+1/-0,5mm) / 0,17" (+0,04/-0,02")
- SIL 240: 5,3mm (+1/-0,5mm) / 0,20" (+0,04/-0,02")



**CERTIFICATIONS**

- SAE J20 R1 Class A.
- Material used in accordance with EU Directive 2015/863 for Restriction of the use of hazardous substances (RoHS 3).



**STANDARD LENGTH**

From 1m to 4m (3,28 to 13,12ft).  
Can be cut to smaller lengths upon customer request.




**APPEARANCE**

Smooth outer and inner appearance.



Technical Table  
See on page: 17

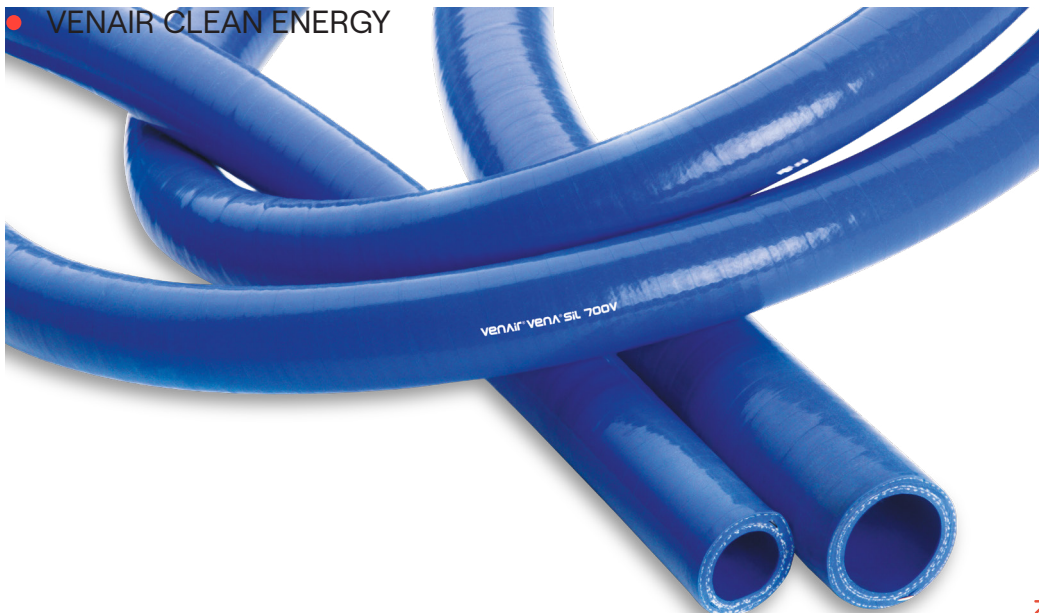

Highly flexible smooth silicone hose

# VENA® SIL 700V



**Material**

Blue Silicone VMQ  
(Vinyl Methyl Quality)  
+ Polyester fabric  
+ Steel wire spring



**Temperature**

-55°C / +180°C-200°C  
(-67°F / +356°F)



**CONSTRUCTION**

Spiral steel wire between two plies of polyester fabric covered in blue silicone.



**CONFIGURATIONS**

SIL 700V-X: Conductive silicone material.



**APPLICATIONS**

For use in water cooling and heating systems. Suitable for use where a small bending radius is required. It is capable for vacuuming applications thanks to its wire spiral.



**STANDARD WALL THICKNESS**

Depending on diameter.



**STANDARD LENGTH**

From 1m to 4m (3,28 to 13,12ft).  
Can be cut to smaller lengths upon customer request.



**CERTIFICATIONS**

- SAE J20R2 Class A.
- Material used in accordance with EU Directive 2015/863 for Restriction of the use of hazardous substances (RoHS 3).



**APPEARANCE**

Smooth outer and inner appearance.



Technical Table  
See on page: 17



Flame resistant hoses for cooling systems

## VENA® SIL FR-V0



### Material

Silicone VMQ  
(Vinyl Methyl Quality)  
+ fabric



### Temperature

-55°C / +200-220°C  
(-67°F / +392-428°F)



### CONSTRUCTION

Special silicone formulation built with several textile reinforcements, specially designed to comply with the most demanding Flammability Standards. Can be manufactured with steel wire spiral. Class. V0 (UL-94).



### STANDARD WALL THICKNESS

Vena®Sil 200 FR-V0 - 3.7mm (+1.0/-0.5mm)  
Vena®Sil 240 FR-V0 - 4.5mm (+1.0/-0.5mm)  
Vena®Sil 700V FR-V0 - 5.5mm (+1.5/- 0.7mm)  
with wire.



### APPLICATIONS

For cooling systems and other liquid or air conduction systems in any kind of engine or vehicle subjected to special Flammability Regulations.



### STANDARD LENGTH

From 1m to 4m (3,28 to 13,12ft). All our standard or customized products can be produced with this option.



### CERTIFICATIONS

UL-94 V0.



Technical Table  
See on page: 18

● VENAIR CLEAN ENERGY

DI WATER  
COOLING SYSTEMS



Flame resistant hoses for cooling  
and turbo systems in railway industry

## VENA® SIL FR-HL



**Material**

Silicone VMQ  
(Vinyl Methyl Quality)  
+ fabric



**Temperature**

-55°C / +200-220°C  
(-67°F / +392-428°F)



### CONSTRUCTION

Special silicone formulation built with several textile reinforcements, specially designed to comply with the most demanding Flammability Standards. Can be manufactured with steel wire spiral. Class. HL2 R22 & R23(EN-45545-2).



### STANDARD WALL THICKNESS

Vena® Sil 200 FR-HL - 3.7mm (+1.0/-0.5mm)  
Vena® Sil 240 FR-HL - 4.5mm (+1.0/-0.5mm)  
Vena® Sil 700V - 5.5mm (+1.5/- 0.7mm) with wire.



### APPLICATIONS

For cooling systems and other liquid or air conduction systems in any kind of engine or vehicle subjected to special Flammability Regulations.



### STANDARD LENGTH

From 1m to 4m (3,28 to 13,12ft). All our standard or customized products can be produced with this option.




### CERTIFICATIONS

Meets or exceeds the EN-45545-2 HL2 (R22 & R23) rating.



Technical Table  
See on page: 18

# 2. Specification Charts

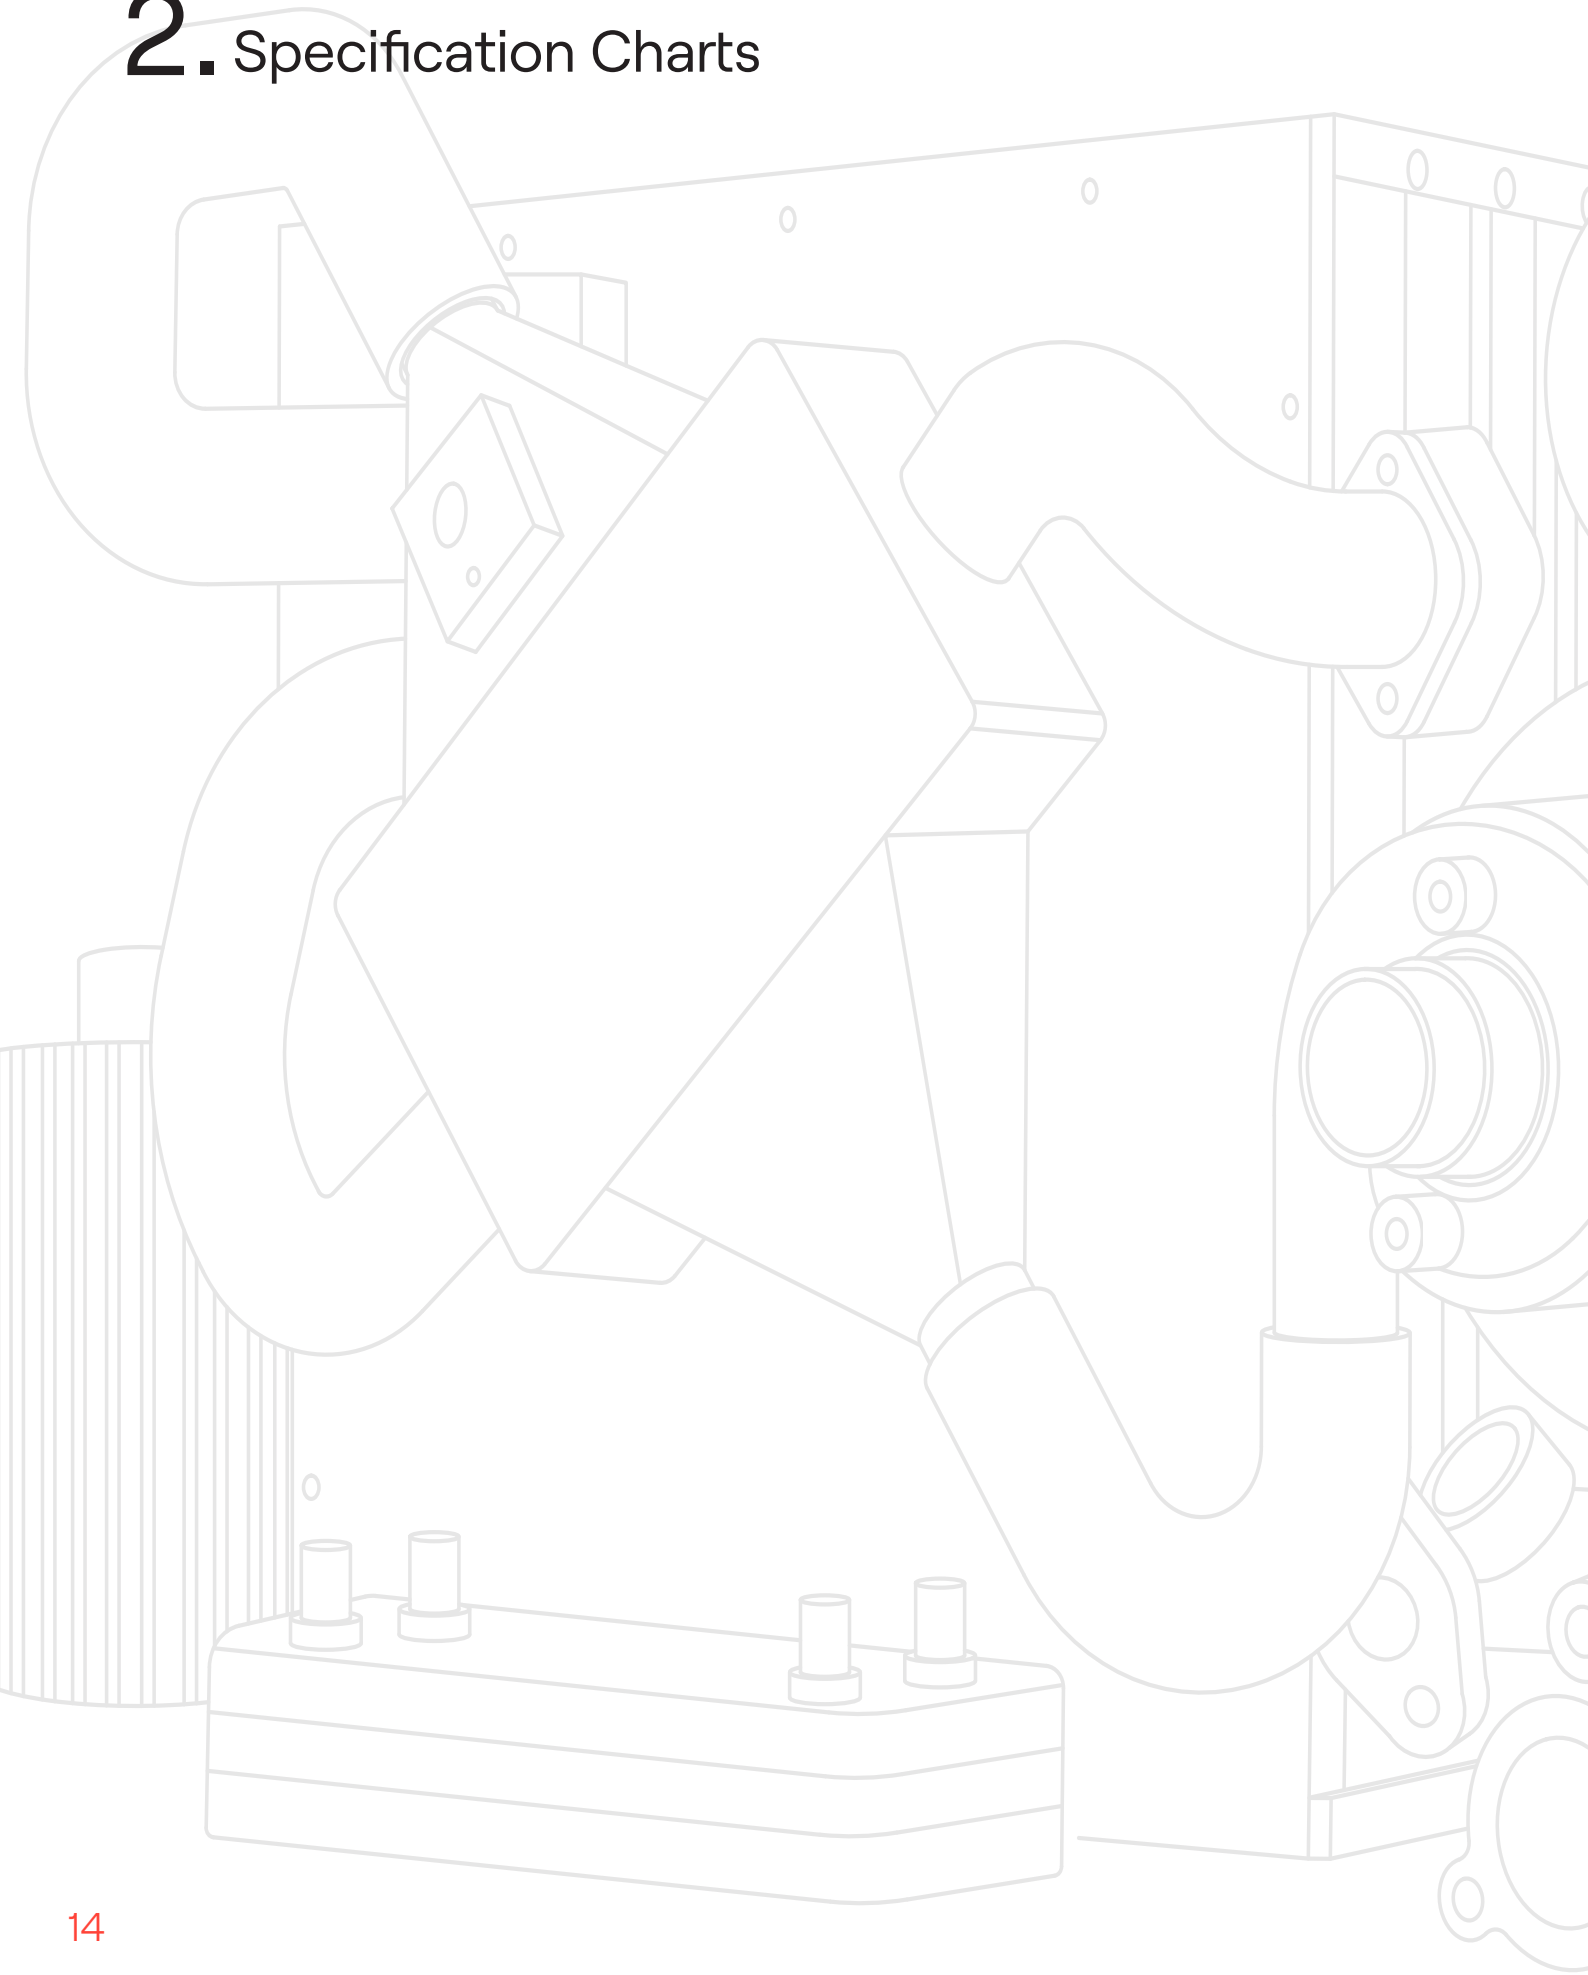

# VENA® PEM FUEL

INNER DIAMETER*		WALL THICKNESS		WORKING PRESSURE**		BURSTING PRESSURE**	
				ISO 1402/2009		ISO 1402/2009	
mm	inch	+1/-0,5 mm	+0,04/-0,02 inch	bar at 20°C	psi at 68°F	bar at 20°C	psi at 68°F
6	1/4	4.3	0.17	16.2	234.4	48.5	703.3
13	1/2	4.3	0.17	9.7	140.6	29.1	421.7
19	3/4	4.3	0.17	7.3	105.4	21.8	316.1
25	1	4.3	0.17	5.9	85.6	17.7	256.7
32	1 1/4	4.3	0.17	4.9	70.8	14.7	212.5
38	1 1/2	4.3	0.17	4.3	62.2	12.9	186.5
45	1 3/4	4.3	0.17	3.8	54.7	11.3	164.0
51	2	4.3	0.17	3.4	49.7	10.3	149.1
57	2 1/4	4.3	0.17	3.2	45.7	9.5	137.0
63	2 1/2	4.3	0.17	2.9	42.3	8.8	127.0

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# VENA® PEM CELL

INNER DIAMETER*		WALL THICKNESS		WORKING PRESSURE**		BURSTING PRESSURE**	
				ISO 1402/2009		ISO 1402/2009	
mm	inch	+1/-0,5 mm	+0,04/-0,02 inch	bar at 20°C	psi at 68°F	bar at 20°C	psi at 68°F
6	1/4	4.3	0.17	25.3	366.4	75.8	1099.1
13	1/2	4.3	0.17	12.9	186.4	38.6	559.2
19	3/4	4.3	0.17	9.2	133.8	27.7	401.3
25	1	4.3	0.17	7.3	105.2	21.8	315.7
32	1 1/4	4.3	0.17	5.8	84.8	17.5	254.2
38	1 1/2	4.3	0.17	5.0	73.0	15.1	219.0
45	1 3/4	4.3	0.17	4.3	63.0	13.0	188.8
51	2	4.3	0.17	3.9	56.4	11.7	169.3
57	2 1/4	4.3	0.17	3.5	51.2	10.6	153.6
63	2 1/2	4.3	0.17	3.2	46.9	9.7	140.8

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# VENA® PEM PURE

INNER DIAMETER*		WALL THICKNESS		WORKING PRESSURE**		BURSTING PRESSURE**	
				ISO 1402/2009		ISO 1402/2009	
mm	inch	+1/-0,5 mm	+0,04/-0,02 inch	bar at 20°C	psi at 68°F	bar at 20°C	psi at 68°F
6	1/4	4.3	0.17	16.2	234.4	48.5	703.3
13	1/2	4.3	0.17	9.7	140.6	29.1	421.7
19	3/4	4.3	0.17	7.3	105.4	21.8	316.1
25	1	4.3	0.17	5.9	85.6	17.7	256.7
32	1 1/4	4.3	0.17	4.9	70.8	14.7	212.5
38	1 1/2	4.3	0.17	4.3	62.2	12.9	186.5
45	1 3/4	4.3	0.17	3.4	54.7	11.3	164.0
51	2	4.3	0.17	3.4	49.7	10.3	149.1
57	2 1/4	4.3	0.17	3.2	45.7	9.5	137.0
63	2 1/2	4.3	0.17	2.9	42.3	8.8	127.0

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# VENA® PEM COOL

INNER DIAMETER*		WALL THICKNESS		WORKING PRESSURE**		BURSTING PRESSURE**	
				ISO 1402/2009		ISO 1402/2009	
mm	inch	+1/-0,5 mm	+0,04/-0,02 inch	bar at 20°C	psi Aat 68°F	bar at 20°C	psi at 68°F
6	1/4	4.3	0.17	16.2	234.4	48.5	703.3
13	1/2	4.3	0.17	9.7	140.6	29.1	421.7
19	3/4	4.3	0.17	7.3	105.4	21.8	316.1
25	1	4.3	0.17	5.9	85.6	17.7	256.7
32	1 1/4	4.3	0.17	4.9	70.8	14.7	212.5
38	1 1/2	4.3	0.17	4.3	62.2	12.9	186.5
45	1 3/4	4.3	0.17	3.8	54.7	11.3	164.0
51	2	4.3	0.17	3.4	49.7	10.3	149.1
57	2 1/4	4.3	0.17	3.2	45.7	9.5	137.0
63	2 1/2	4.3	0.17	2.9	42.3	8.8	127.0

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).



# VENA® SIL 200

INNER DIAMETER*		WORKING PRESSURE**		BURSTING PRESSURE	
		ISO 1402/2009		ISO 1402/2009	
mm	inch	bar at 20°C	psi at 68°F	bar at 20°C	psi at 68°F
6	1/4	16,1	234	48,5	703
13	1/2	9,7	141	29,1	422
19	3/4	7,2	104	21,8	316
25	1	5,9	86	17,7	257
32	1 1/4	4,9	71	14,7	213
38	1 1/2	4,3	62	12,9	187
45	1 3/4	3,7	54	11,3	164
51	2	3,4	49	10,3	149
57	2 1/4	3,1	45	9,4	136
63	2 1/2	2,9	42	8,8	128

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# VENA® SIL 700V

INNER DIAMETER*		WORKING PRESSURE**		BURSTING PRESSURE**		BENDING RADIUS	
		ISO 1402/2009		ISO 1402/2009		ISO 10619-1	
mm	inch	bar	psi	bar at 20°C	psi at 68°F	mm	inch
6	1/4	18.8	272.9	56.4	818.7	21	0.8
10	3/8	17.5	253.3	52.4	760.0	28	1.1
13	1/2	16.5	239.3	49.5	717.8	34	1.3
19	3/4	14.7	212.7	44.0	638.2	49	1.9
25	1	13.0	188.3	38.9	564.8	66	2.6
30	1 3/16	11.7	169.5	35.1	508.5	82	3.2
38	1 1/2	9.8	142.5	29.5	427.4	113	4.4
51	2	7.3	106.6	22.0	319.7	173	6.8
63	2 1/2	5.7	82.1	17.0	246.4	239	9.4
76	3	4.5	65.2	13.5	195.5	324	12.7

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# VENA® SIL 200 FR-HL/ FR-V0

INNER DIAMETER*		WALL THICKNESS		WORKING PRESSURE**		BURSTING PRESSURE**	
				ISO 1402/2009		ISO 1402/2000	
mm	inch	+1/-0,5 mm	+0,04/-0,02 inch	Bar at 20°C	Psi at 68°F	Bar at 20°C	Psi at 68°F
18	11/16	3.7	0.15	13.4	194.3	40.3	584.4
25	1	3.7	0.15	8.4	121.8	25.3	366.9
35	1 3/8	3.7	0.15	5.5	79.2	16.2	237.5
38	1 1/2	3.7	0.15	4.6	66.7	13.7	198.7
48	1 7/8	3.7	0.15	4.1	59.5	12.3	178.4
60	2 3/8	3.7	0.15	3.5	51.2	10.6	153.7
65	2 9/16	3.7	0.15	3.3	47.9	9.9	143.6
70	2 3/4	3.7	0.15	3.1	44.5	9.2	133.4
75	3	3.7	0.15	2.8	40.6	8.4	121.8
80	3 1/8	3.7	0.15	2.6	37.2	7.7	111.7

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# VENA® SIL 240 FR-HL/ FR-V0

INNER DIAMETER*		WALL THICKNESS		WORKING PRESSURE**		BURSTING PRESSURE**	
				ISO 1402/2009		ISO 1402/2000	
mm	inch	+1/-0,5 mm	+0,04/-0,02 inch	Bar at 20°C	Psi at 68°F	Bar at 20°C	Psi at 68°F
18	11/16	4.5	0.18	14.6	211.7	43.8	635.1
25	1	4.5	0.18	10.4	150.8	31.3	453.9
35	1 3/8	4.5	0.18	8.4	122.2	22.7	366.8
38	1 1/2	4.5	0.18	7.8	113.1	23.5	340.8
48	1 7/8	4.5	0.18	6.1	88.5	18.3	265.4
60	2 3/8	4.5	0.18	5.4	78.3	16.1	233.5
65	2 9/16	4.5	0.18	5.0	72.5	15.0	217.5
70	2 3/4	4.5	0.18	4.7	68.2	14.1	204.5
75	3	4.5	0.18	4.4	63.8	13.4	194.3
80	3 1/8	4.5	0.18	4.2	60.9	12.6	182.7

\*Other diameters can also be manufactured. Please consult.

\*\* Pressure data is noted at ambient temperature. Pressure values should be reduced by 20% for each increase of 100°C (21°F).

# 3. Venair in the world

## EUROPE

- **VENAIR GMBH NORTH**  
Dortmund - Germany  
kontakt@venair.com
- **VENAIR GMBH SOUTH**  
Freiberg am Neckar - Germany  
kontakt@venair.com
- **VENAIR SARL**  
Lyon - France  
contact@venair.com
- **VENAIR SARL WEST**  
Nantes - France  
contact@venair.com
- **VENAIR SWEDEN**  
Stockholm - Sweden  
sesales@venair.com
- **VENAIR SP. Z O.O.**  
Warszawa - Poland  
plsales@venair.com
- **VENAIR O.O.O**  
Moscow - Russia  
rusales@venair.com
- **VENAIR ESPAÑA**  
Terrassa - España  
esventas@venair.com
- **VENAIR ÜRÜNLER**  
Bursa - Turkey  
venairtr@venair.com
- **VENAIR LTD**  
Warrington - UK  
uksales@venair.com
- **VENAIR MANUFACTURING S.R.L**  
Ploiesti - Romania  
rocontact@venair.com
- **VENAIR SRL**  
Castelletto Monferrato - Italy  
commerciale@venair.com
- **VENAIR D.O.O**  
Zagreb - Croatia  
hrsales@venair.com

## ASIA

- **VENAIR INDIA SOUTH**  
Karnataka - India  
insales@venair.com
- **VENAIR INDIA WEST**  
Maharashtra - India  
insales@venair.com
- **VENAIR SHANGAI TRADING CO LTD**  
Shanghai - China  
cnsales@venair.com
- **VENAIR SHANGAI TRADING CO LTD**  
Guangzhou - China  
cnsales@venair.com
- **VENAIR SHANGAI TRADING CO LTD**  
Beijing - China  
cnsales@venair.com
- **VENAIR SINGAPORE PTE LTD**  
Singapore - Singapore  
sgsales@venair.com
- **VENAIR THAILAND**  
Bangkok - Thailand  
thsales@venair.com
- **VINASIL VIETNAM CO LTD**  
Ho Chi Mihn City - Vietnam  
vnsales@venair.com
- **VENAIR ISRAEL**  
Petaj Tikva - Israel  
ilsales@venair.com

## AMERICA

- **VENAIR INC**  
Miami gardens - USA  
usasales@venair.com
- **VENAIR INC**  
Philadelphia - USA  
usasales@venair.com
- **VENAIR INC**  
Merrimack - USA  
usasales@venair.com
- **VENAIR MEXICO**  
Cuautitlan Izcalli - México  
mxsales@venair.com
- **VENAIR EIRELI**  
São Paulo - Brasil  
brsales@venair.com
- **VENAIR COLOMBIA**  
Ciudad de Bogotá - Colombia  
cosales@venair.com

## AFRICA

- **VENAIR SOUTH AFRICA**  
Johannesburg - South Africa  
zasales@venair.com



Venair reserves the right to change, amend, modify, suspend, continue or terminate all or any part of this Catalogue at any time without notice. It is the user's responsibility to ensure the suitability and safety of the VENAIR products for all intended uses. All the tests must be conducted in accordance with applicable regulatory requirements in order to determine the safety and effectiveness for use of the hoses in any particular application.

Limited Warranty: For a period of 6 months from the date of sale, VENAIR warrants this product to be free from defects in materials and workmanship. Our only obligation will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risk, if any, including the risk of injury, loss or damage, direct or consequential, arising out of the use, misuse, or inability to use, this product. THIS WARRANTY IS IN LIEU OF THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE, AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. No deviation is authorized. VENAIR assumes no obligations or liability for any advice furnished by it, or for results obtained with respect to those products. All such advice is given and accepted at the buyer's risk. Vena, Venair and the Venair logo are trademarks of Venair Ibérica S.A.U.  
ILB