


VENA® STEAMFLOW

Ref: DO 03.10 FT 355 Rev. 02 Date: 07/11/2022



APPLICATIONS

The self-developed material in Vena® SteamFlow ensures high resistance to saturated steam in continuous flow applications in the food and pharma industries at high temperatures.


Its robust but flexible design makes this hose perfect for those applications where flexibility and good mechanical performance are needed. Abrasion resistant outer layer in Vena® SteamFlow guarantees good performance in most demanding applications.

PROPERTIES

- Odorless, tasteless, and completely non-toxic
- Smooth inner appearance. Black colored and smooth outer appearance
- Abrasion resistant outer layer
- Can be equipped with 316L stainless steel fittings on each end with roughness value of less than 0.8 µm (smaller roughness is possible on request)
- Operational temperature range from -40°C (-40 F) to +150°C (302 F)
- Standard manufacturing length is 6meters long (19.69 ft.)
- Compatible with CIP cleaning processes

CONSTRUCTION

This product is manufactured with inner cream-color food quality rubber and outer black rubber cover. Equipped with two plies of synthetic fabric reinforcements and metal wire spring. All encased inside the hose.

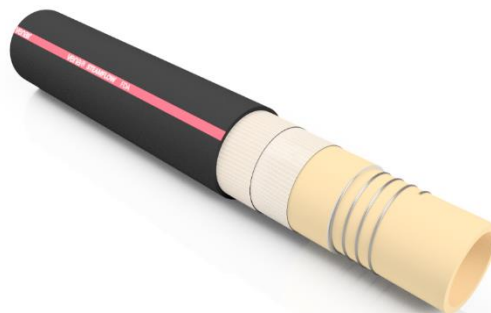

REGULATIONS

Rubber inner layer in accordance with:

- US FDA Standard 21 CFR 177.2600

This hose is in accordance with the RoHS Directive 2002/95/EC and its subsequent amendments including the RoHS2 Directive 2011/65/EU and RoHS3 Directive 2015/863

VENA® STEAMFLOW

Ref: DO 03.10 FT 355 Rev. 02 Date: 07/11/2022

TECHNICAL SPECIFICATIONS


Inner Diameter		Wall Thickness		Working pressure ISO 1402		Bursting pressure ISO 1402		Bending radius ISO 10619-1	
mm	inch	+1.5/-1.5 mm	+0.06/-0.06 inch	Bar at 23°C	Psi at 73,4°F	Bar at 23°C	Psi at 73,4°F	mm	inch
10	3/8	6,5	0,26	21,3	308,9	63,9	926,8	123,8	4,9
13	1/2	6,5	0,26	19,4	281,4	58,2	844,1	135,3	5,3
16	5/8	6,5	0,26	17,1	247,5	51,2	742,6	148,2	5,8
19	3/4	6,5	0,26	15,3	221,4	45,8	664,3	162,4	6,4
25	1	6,5	0,26	11,4	165,3	34,2	496,0	194,7	7,7
32	1 1/4	6,5	0,26	9,9	143,1	29,6	429,3	239,1	9,4
38	1 1/2	6,5	0,26	9,6	139,7	28,9	419,2	283	11,1
50	2	6,5	0,26	8,6	124,7	25,8	374,2	396	15,6

CLEANING CONDITIONS

	Vena® SteamFlow
HOT WATER	Up to 95°C
CAUSTIC SODA	Up to 3% - 80°C
NITRIC ACID	Up to 1% - 23°C
PERACETIC ACID	Up to 1% - 23°C

ADDITIONAL INFORMATION

Steam resistance comparison at continuous flow of saturated steam at 130°C (1,7 bar) in 72h cycles. After each cycle, optical inspection, and hydrostatic tests are carried out to check degradation of the hoses.

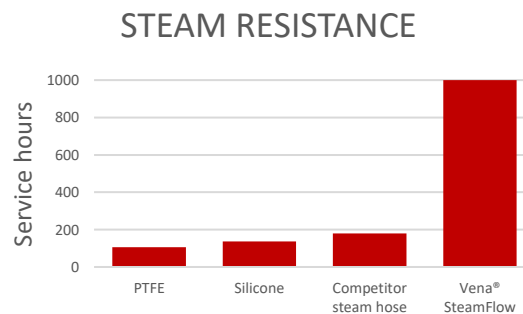

VENA® STEAMFLOW

Ref: DO 03.10 FT 355 Rev. 02 Date: 07/11/2022

**LIMITATIONS**

Respect the bending radius and work pressure established values. High temperatures may affect the bursting and working pressure values

Extreme working conditions can attack the inner surface of the hose. It is advisable to inspect the inner appearance for cracks or swelling and replace the hose if necessary

Hose cover should be inspected over the entire length for signs of hardening, abrasion, cuts, kinking or crushing